

Shanghai Liangxin Electrical Co., Ltd.

NDM3-250 Product Specification

(IPD-ENG-DEV-T20 A1 2016-09-23)

Prepared by	王虎	Date	2020.08.04
Reviewed by	彭浩然	Date	2020.08.04
Countersigned by	尹宏雨	Date	2020.08.04
Approved by	胡琪	Date	2020.08.04



Revision History					
Version	Revision Reason/Content	Implementation Date	Prepared by	Reviewed by	Approved by



1. Applicable Scope and Purpose of Circuit Breaker

The NDM3-250 molded case circuit breaker (hereinafter referred to as circuit breaker) applies to infrequent switching of circuits with the AC 50/60Hz, the working voltage of AC690V and working current of 250A as well as infrequent motor starting. With the overload, short circuit and undervoltage protection functions, the circuit breaker can protect lines and power equipment from damage.

2. Product Picture of Circuit Breaker (The picture is for reference only; the specific kind prevail)




Picture of the Product

3. Specification and Model Description of Circuit Breaker

ND	M	3	-	250	□	□	/	□	□	□	□	□	□	□	□	□
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
SN	SN name				NDM3											
1	Enterprise code				ND: “Nader” low-voltage apparatus											
2	Product code				M: Molded case circuit breaker (MCCB)											
3	Design SN				3											
4	Shell frame level				250											
5	Breaking capacity level				L: Standard type											
					M: Relatively high breaking type											
					H: High breaking type											
6	Operation mode				No code: Direct handle-operated mode											
					P: Motor-operated											
					Z: Rotary operation											
7	Number of poles				3, 4											
8	Release code				0: Release (none)											
					2: Instantaneous release only											
					3: Complex release											
9	Accessory code				See Table 1											
10	Application code				No code: Power distribution type											
					2: Motor protection type											
11	N-pole (neutral pole) type of the 4P product				A: The N-pole isn't installed with an overcurrent release, but											
					B: The N-pole isn't installed with an overcurrent release, but on-off with the other three poles											
					C: The N-pole is installed with an overcurrent tripper, and on-off with the other three poles											
12	Special use				Q: Voltage-check self-reset											
13	Special function				I: Non-tripping at the time of alarming											
14	Rated current				See Table 2											
15	Cabling type				No code: Normal product											
					P: Connection busbar											
					Z1: Rear-plate connection											
					Z2H: Plug-in rear-plate connection											
					Z2Q: Plug-in front-plate connection											
					Z3H: Integrated plug-in rear-plate connection											
					Z3Q: Integrated plug-in front-plate connection											
16	Other codes				DL: Dedicated for electric power											
					Codes of internal and external accessories: Such as manual operation: CS1-A, electric operation: DC1 220V, shunt: AC230V, undervoltage: DC220V											



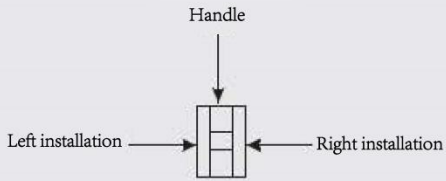



Table 1: Comparison Table of Accessory Code:











































Handle

Left installation → → → Right installation

Legend

-  Single auxiliary contact
-  Dual-auxiliary contact
-  Alarm contact
-  Shunt release
-  Under-voltage release
-  Auxiliary alarm contact (a single accessory features the auxiliary and alarm functions)

Access ory code	Accessory name	Model	
		Installation Position	
		Number of poles	
		NDM3 -250L/M/H	NDM3-250
		3	4
00	N/A	—	—
10	Shunt release		
20	Dual-auxiliary contact		
21	Single auxiliary contact		
30	Under-voltage release		
40	Shunt release, dual-auxiliary contact		
41	Shunt release, single auxiliary contact		
50	Shunt release, under-voltage release		
60	Two sets of dual-auxiliary contacts		
61	Two sets of single auxiliary contacts		
62	Dual-auxiliary contact, single auxiliary contact		
70	Under-voltage release, single auxiliary contact		
71	Under-voltage release, dual-auxiliary contact		
08	Alarm contact		
18	Shunt release, alarm contact		
28	Dual-auxiliary contact, alarm contact		
38	Under-voltage release, alarm contact		
48	Shunt release, auxiliary alarm contact		
58	Auxiliary alarm contact		
68	Dual-auxiliary contact, auxiliary alarm contact		
78	Under-voltage release, auxiliary alarm contact		

2020.08.05
文件控制

4. Main Technical Parameters of Circuit Breaker

Table 2 Main Technical Parameters of Circuit Breaker

Model		NDM3-250			
Rated current of frame Inm (A)		250			
Rated current In (A)		100, 125, 140, 160, 180, 200, 225, 250			
Rated insulation voltage Ui (AC V)		1000			
Rated impulse withstand voltage Uimp (V)		8000			
Rated working voltage Ue (AC V)		380/400/415, 500, 660/690			
Power frequency withstand voltage U (1min) (V)		3500			
Utilization category		A			
Number of poles		3			4
Breaking capacity level		L	M	H	/
Rated limit short-circuit breaking capacity Icu (kA)	AC380/400/415V	50	70	100	70
	AC500V	/	40	/	40
	AC660/690V	/	20	/	20
Rated operating short-circuit breaking capacity Ics (kA)	AC380/400/415V	40	50	70	50
	AC500V	/	40	/	40
	AC660/690V	/	10	/	10
Operating performance (times)	Electrical life	8000			
	Mechanical life	20000			



4.1 Selection of the circuit breaker connecting bus or cable cross-section area:

Table 3 Selection of the NDM3-250 Connecting Bus or Cable Cross-section Area

Rated current (A)	100	125, 140	160	180, 200, 225	250
Wire cross-section area (mm ²)	35	50	70	95	120

4.2 Tightening Torque of the Circuit Breaker Terminal and Mounting Screw

Table 4 Tightening Torque of the Circuit Breaker Terminal and Mounting Screw

Model	Thread diameter (mm)	Torque (N • m)
NDM3-250	M8	12
	M4	2.4

4.3 Derating factor of temperature change for the circuit breaker

Table 5 Derating Factor Table of Temperature Change for the Circuit Breaker

Model	Derating factor of product temperature change							
NDM3-250	Temperature (°C)	40	45	50	55	60	65	70
	Derating factor	1	0.982	0.963	0.944	0.924	0.904	0.882

Note: 1) When the operating ambient temperature is below +40°C, the product can be used normally without derating capacity.

2) The above derating factors are measured at the frame current.

4.4 High-altitude derating factor of the circuit breaker

Table 6 High-altitude Derating Factor Table of Circuit Breaker


Altitude (km)	Correction factor of the working current	Correction factor of the working voltage	Correction factor of the power frequency
2	In	Ue	U
2.5	In	Ue	U
3	0.980In	0.87Ue	0.909U
3.5	0.972In	0.846Ue	0.858U
4	0.963In	0.813Ue	0.820U
4.5	0.951In	0.781Ue	0.784U
5	0.938In	0.743Ue	0.752U

5. Normal Working Environment of Circuit Breaker

- 1) The altitude of the installation site doesn't exceed 2,000m. See the "High-altitude Derating Factor Table of Circuit Breaker" for the derating factor at the altitude;
- 2) The ambient temperature is $-35^{\circ}\text{C} \sim +70^{\circ}\text{C}$; the average within 24 h shall not be more than $+35^{\circ}\text{C}$. If the ambient temperature is higher than $+40^{\circ}\text{C}$, the user needs to reduce the capacity. See the "Derating Factor Table of Temperature Change for the Circuit Breaker" for the derating factor;
- 3) Its relative humidity at an ambient temperature of $+40^{\circ}\text{C}$ should not exceed 50%. A higher relative humidity is allowed at a lower temperature. For example, the relative humidity at 20°C can reach 90%; for frost due to temperature change, the corresponding measures should be taken;
- 4) The product can withstand the effects of wet air, salt mist, oil mist and mould;
- 5) The installation category of the circuit breaker connected to the main loop is: Category III (power distribution and control level), The installation category of the circuit breaker not connected to the main loop is: Category II (load level);
- 6) The pollution level is Level 3;
- 7) The product should be installed in places that are free from explosive media, media corrosive to metal, insulation damaging gas, and conductive dust, which should be also avoided from snow and rain;
- 8) In case of stricter user conditions than the above description, negotiate with the manufacturer.



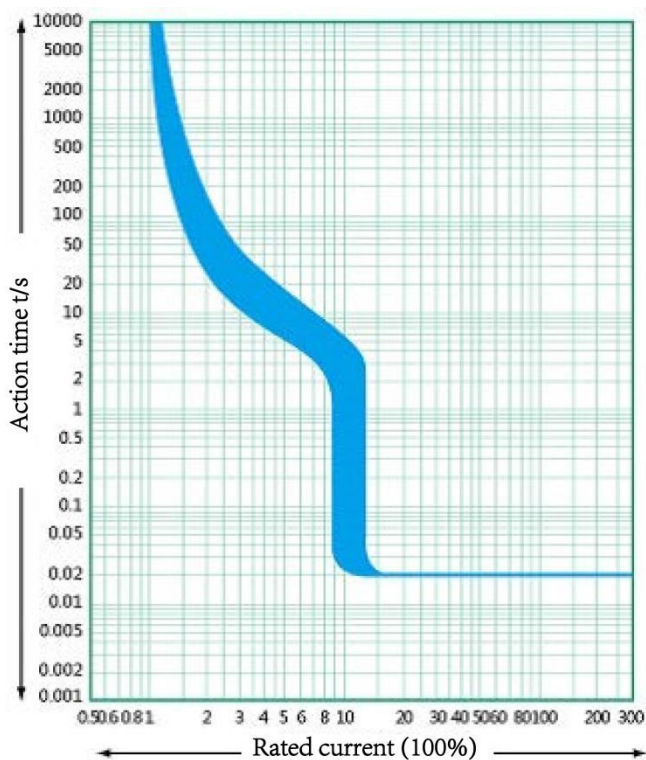6. Short-circuit Overload Protection Characteristic Curve of Circuit Breaker




Time/Current Characteristic Curve



7. Outline and Mounting Hole Dimensions of Circuit Breaker

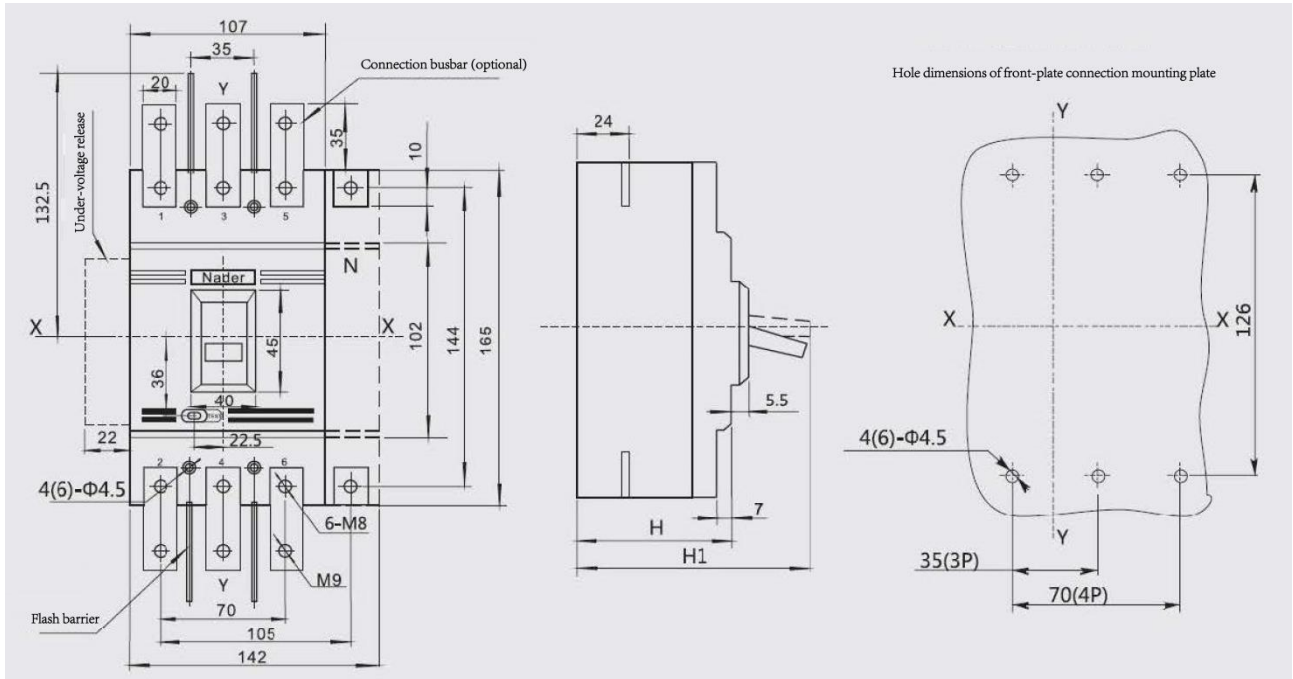7.1 Outline and mounting hole dimensions of circuit breaker



Model	H	H1
NDM3-250L	88	122.5
NDM3-250M/H	105	139.5
NDM3-250 4P		

Note: The limit deviation not indicated with the tolerance dimensions is as per GB/T 1804-m.

7.2 Safe mounting distance of circuit breaker

Table 7 Insulation Distance Mounted in the Metal Cabinet (Unit: mm)

Mounting distance	A (inlet wire end to the cabinet face)		B (distance from side to the cabinet face)	C (outlet wire end to the cabinet face)
	With a terminal cover	Without a terminal cover		
NDM3-250	25	65	30	30




Table 8 Minimum Center Distance between Rowed Circuit Breakers (Unit: mm)

Model	Width of circuit breaker		I Center distance	
	3 poles	4 poles	3 poles	4 poles
NDM3-250	107	142	137	172

Note: Check the connected busbar or cable during rowing or stacking of the circuit breaker to ensure that the air insulation distance won't be reduced.

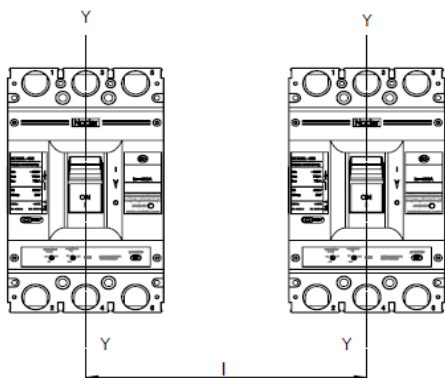


Table 9 Minimum Distance between Stacked Circuit Breakers (Unit: mm)


Model	H (distance of circuit breaker from bottom)	
	With a terminal cover	Without a terminal cover
NDM3-250	90	93

Note: 1) Bare cable connection

2) Cable insulating connection

3) Connection without insulation

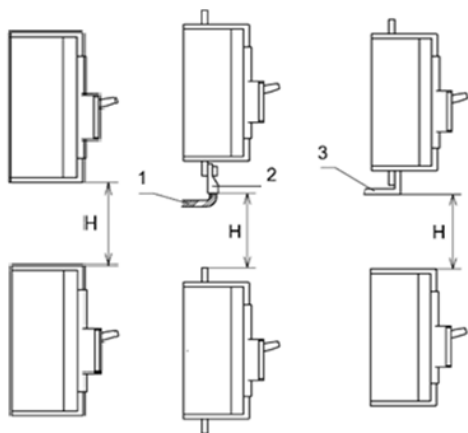
Requirements: Check whether the terminal cover or phase partition is assembled properly before products are energized.



8. Installation Direction of Circuit Breaker

For vertical installation of the product, the gradient between the installation surface and the vertical plane is no more than $\pm 22.5^\circ$.

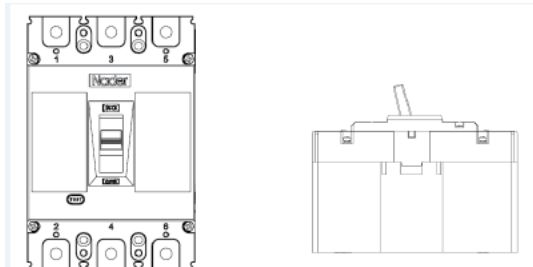Horizontal installation of the product.



Vertical Installation

Horizontal Installation

9. Packaging and Storage of Circuit Breaker

Minimum packaging quantity: 1 piece/box. The packaged products should be stored in a warehouse with the air ventilation and the relative humidity no more than 80% when the ambient temperature is $-40^\circ\text{C}\sim+75^\circ\text{C}$. No acidic alkaline or other corrosive gas exists in the ambient air in the warehouse. Under the above conditions, the storage period shall be no more than three years since the manufacturing date.

10. Installation Accessory List of Circuit Breaker

SN	Name	Specification	3P Quantity/Set	4P Quantity/Set
1	Cross small pan-head screw	M4×45	4	6
2	Hexagon nut	M4	4	6
3	Spring washer	4	4	6
4	Plain washer	4	4	6
5	Phase partition	—	4	6



11. Circuit Breaker Notes

- 1) Various characteristics and accessories of the circuit breaker are set in the factory. The circuit breaker, tripping unit or other accessories can only be adjusted, installed and maintained by the trained or qualified professionals according to the parameter requirements of the line design;
- 2) Ensure that the power supply is off before installing or removing any device;
- 3) The circuit breaker handle can be located in three positions, indicating three states: on, off and free tripping. When the handle is in the free tripping position, pull the handle in the off direction when the circuit breaker is connected and on.



“The storage life is three years”

Record number: LX4.203R-14B