

Shanghai Liangxin Electrical Co., Ltd.

NDM3Z-800 Product Specification

(IPD-ENG-DEV-T20 A1 2016-09-23)


Prepared by	孙兰萍	Date	2021-09-29
Reviewed by	李阳	Date	2021-09-30
Countersigned by	胡琪	Date	2021-09-30
Approved by	丁飞	Date	2021-09-30

Post code: 201315 Tel.: (021) 68586699
Page 2 of 14

1. Applicable Scope and Purpose of Circuit Breaker

The NDM3Z-800 DC molded case circuit breaker (hereinafter referred to as circuit breaker) applies to the DC system application environment and the electric circuit with the working voltage of DC1000V and the working current of 1440A. With the overload, short circuit and undervoltage protection functions, the circuit breaker can protect lines and power equipment from damage.

2. Product Picture of Circuit Breaker (The picture is for reference only; the specific kind prevail)

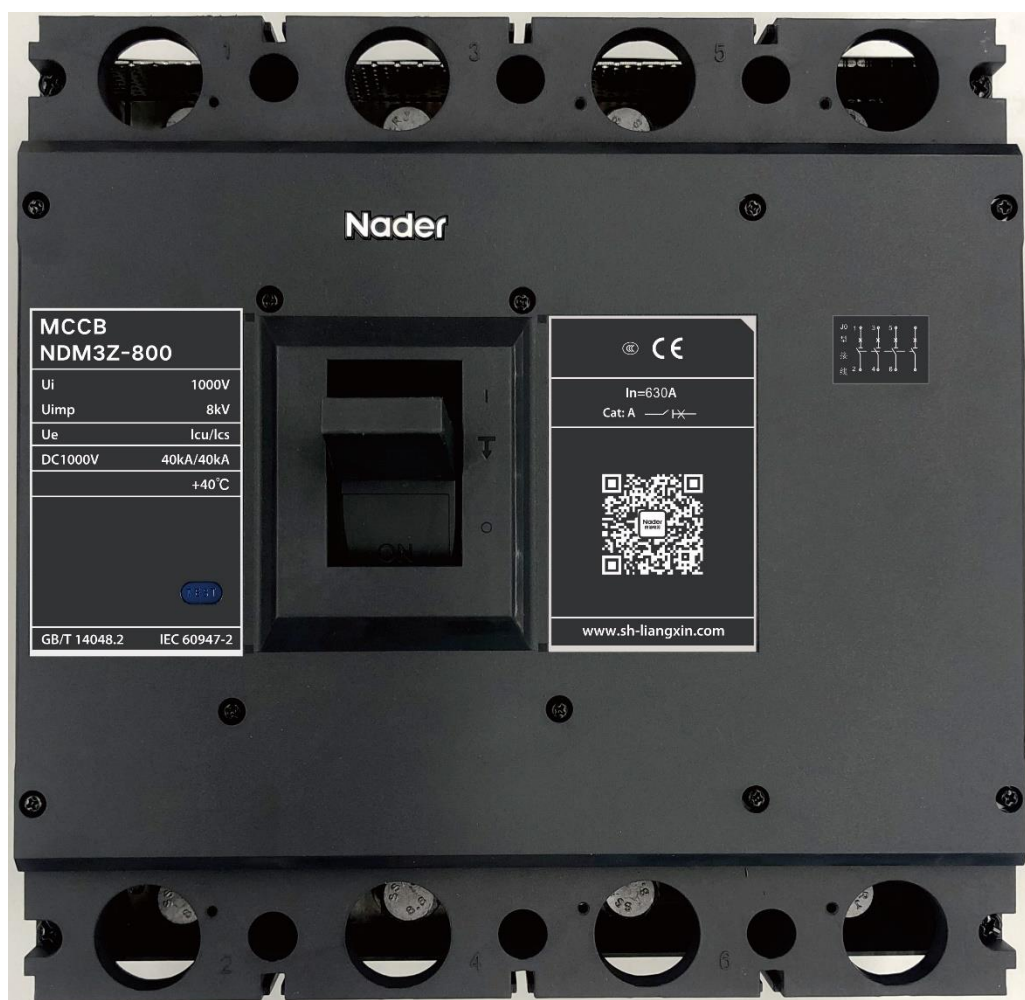

Picture of the Product

3. Specification and Model Description of Circuit Breaker

<u>ND</u> 1	<u>M</u> 2	<u>3</u> 3	<u>Z</u> - <u>800</u> 4 5	<u>□</u> 6	<u>□</u> 7	<u>□</u> / <u>□</u> 8 9	<u>□</u> 10	<u>□</u> 11	<u>□</u> 12	<u>□</u> 13
SN	SN name		NDM3Z							
1	Enterprise code		ND: "Nader" low-voltage apparatus							
2	Product code		M: Molded case circuit breaker (MCCB)							
3	Design SN		3							
4	Derived code of		Z: DC							
5	Shell frame level		800							
6	Derived code of		No code: Conventional type							
7	Breaking		No code: Normal product							
8	Operation mode		No code: Direct handle-operated mode							
			P: Motor-operated							
			Z: Rotation handle							
9	Number of poles		2, 3, 4							
10	Release code		0: Release (none)							
			2: Instantaneous tripper only							
			3: Complex tripper							
11	Accessory code		See Table 1							
12	Rated current		See Table 2							
13	Cabling type		2P No code: Normal product							
			3P No code: Normal product, J0							
			4P: J0, J1, J2, J3, bipolar parallel (only J0 for 700A/800A)							

Table 1: Comparison Table of Accessory Code:

Accessory code		Accessory name	Model		
			2	3	4
00	N/A		—	—	—
10	Shunt release				
20	Dual-auxiliary contact				
21	Single auxiliary contact				
30	Under-voltage release				
40	Shunt release, dual-auxiliary contact				
41	Shunt release, single auxiliary contact				
50	Shunt release, under-voltage release				
60	Two sets of dual-auxiliary contacts				
61	Two sets of single auxiliary contacts				
62	Dual-auxiliary contact, single auxiliary contact				
70	Under-voltage release, dual-auxiliary contact				
71	Under-voltage release, single auxiliary contact				
08	Alarm contact				
18	Shunt release, alarm contact				
28	Dual-auxiliary contact, alarm contact Under-				
38	voltage release, alarm contact		—	—	—
48	Shunt release, auxiliary alarm contact Auxiliary				
58	alarm contact				
68	Dual-auxiliary contact, auxiliary alarm contact				
78	Under-voltage release, auxiliary alarm contact		—	—	—

4. Main Technical Parameters of Circuit Breaker

Table 2 Main Technical Parameters of Circuit Breaker

Model	NDM3Z-800					
Rated current of frame Inm (A)	800					
Rated current In (A)	630, 700, 800, 1250 (parallel), 1440 (parallel)					
Rated insulation voltage Ui (AC V)	1000					
Rated impulse withstand voltage Uimp (V)	8000					
Power frequency withstand voltage U (1min) (V)	3500					
Utilization category	A					
Number of poles	2		3	4	4 (parallel)	
Rated working voltage Ue (DC V)	500	690	750	1000	500	630
Rated limit short-circuit breaking capacity Icu (kA)	35	8	40	40	30	20
Rated operating short-circuit breaking capacity Ics (kA)	35	8	40	40	30	20
Operating performance (times)	Electrical life		1000			
	Mechanical life	Maintainable free life	5000			
		Maintainable life	10000			

4.1 Selection of the circuit breaker connecting bus or cable cross-section area:

Table 3 Selection of the NDM3Z-800 Connecting Bus or Cable Cross-section Area

Rated current In (A)	Cable section		Copper bar size	
	Quantity	Cross section (mm ²)	Quantity	Dimension (mm ²)
630	2	185	2	40×5
700	2	240	2	50×5
800	2	240	2	50×5
1250	/	/	2	80×5
1440	/	/	2	100×5

4.2 Tightening Torque of the Circuit Breaker Terminal and Mounting Screw

Table 4 Tightening Torque of the Circuit Breaker Terminal and Mounting Screw

Model	Thread diameter (mm)	Torque (N·m)
NDM3Z-800	M12	28
	M6	6

4.3 Derating factor of temperature change for the circuit breaker

Table 5 Derating Factor Table of Temperature Change for the Circuit Breaker

Model	Derating factor of product temperature change							
NDM3Z-800	Temperature (°C)	40	45	50	55	60	65	70
	Derating factor	1	1	1	0.92	0.89	0.85	0.80

Note: 1) When the operating ambient temperature is below 50°C, the product can be used normally without derating capacity.

2) The above derating factors are measured at the frame current.

4.4 High-altitude derating factor of the circuit breaker


Table 6 High-altitude Derating Factor Table of Circuit Breaker

Elevation (m)	Working current correction coefficient	Maximum working current correction coefficient (V)	Power frequency withstand voltage correction coefficient (V)	Isolation voltage correction coefficient (V)
2000	1	1	1	1
2500	1	1	1	1
3000	0.98	1	1	1
3500	0.95	1	1	1
4000	0.93	1	1	1
4500	0.91	1	1	1
5000	0.89	1	1	1

5. Normal Working Environment of Circuit Breaker

- 1) The altitude of the installation site doesn't exceed 2,500m. See the "High-altitude Derating Factor Table of Circuit Breaker" for the derating factor at the altitude;
- 2) The ambient temperature is $-35^{\circ}\text{C} \sim +70^{\circ}\text{C}$; the average within 24 h shall not be more than $+35^{\circ}\text{C}$. If the ambient temperature is higher than $+50^{\circ}\text{C}$, the user needs to reduce the capacity. See the "Derating Factor Table of Temperature Change for the Circuit Breaker" for the derating factor;
- 3) Its relative humidity at an ambient temperature of $+40^{\circ}\text{C}$ should not exceed 50%. A higher relative humidity is allowed at a lower temperature. For example, the relative humidity at 20°C can reach 90%; for frost due to temperature change, the corresponding measures should be taken;
- 4) The product can withstand the effects of wet air, salt mist, oil mist and mould;
- 5) The installation category of the circuit breaker connected to the main loop is: Category III (power distribution and control level), The installation category of the circuit breaker not connected to the main loop is: Category II (load level);
- 6) The pollution level is Level 3;
- 7) The product should be installed in places that are free from explosive media, media corrosive to metal, insulation damaging gas, and conductive dust, which should be also avoided from snow and rain;
- 8) In case of stricter user conditions than the above description, negotiate with the manufacturer.


6. Short-circuit Overload Protection Characteristic Curve of Circuit Breaker

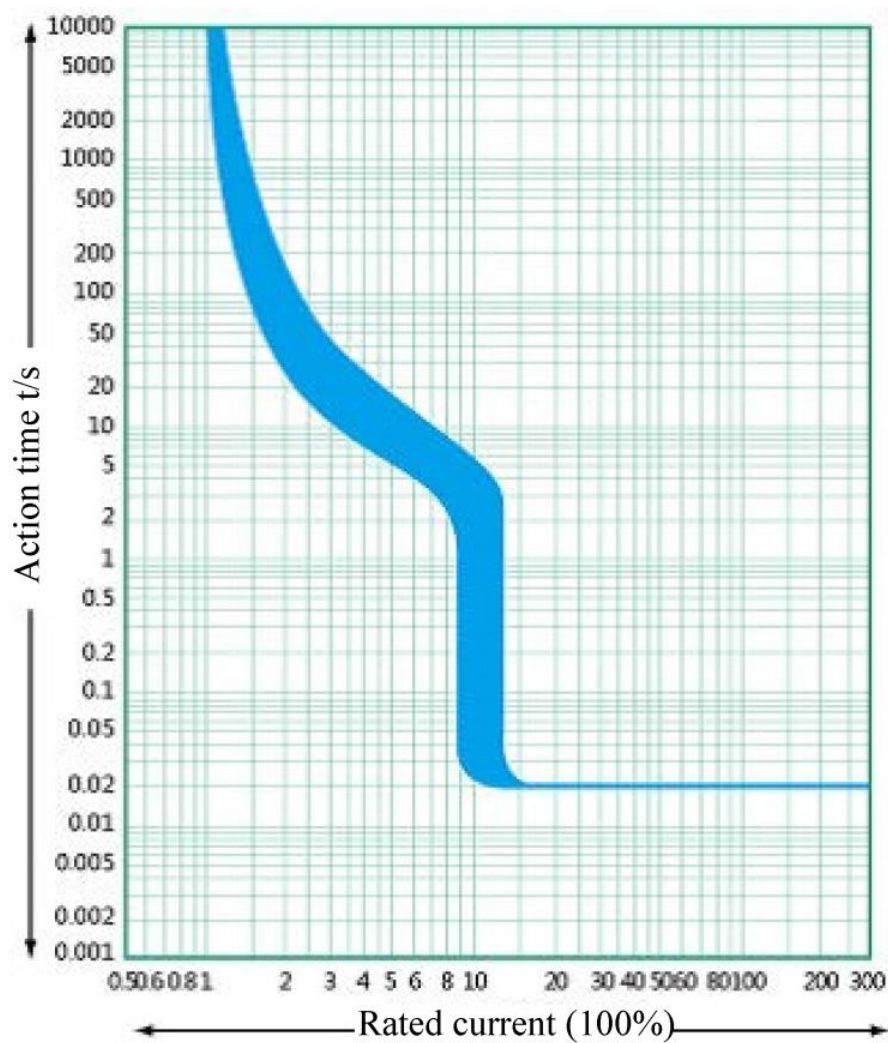


Time/Current Characteristic Curve


7.1 Outline and mounting hole dimensions of circuit breaker

3P

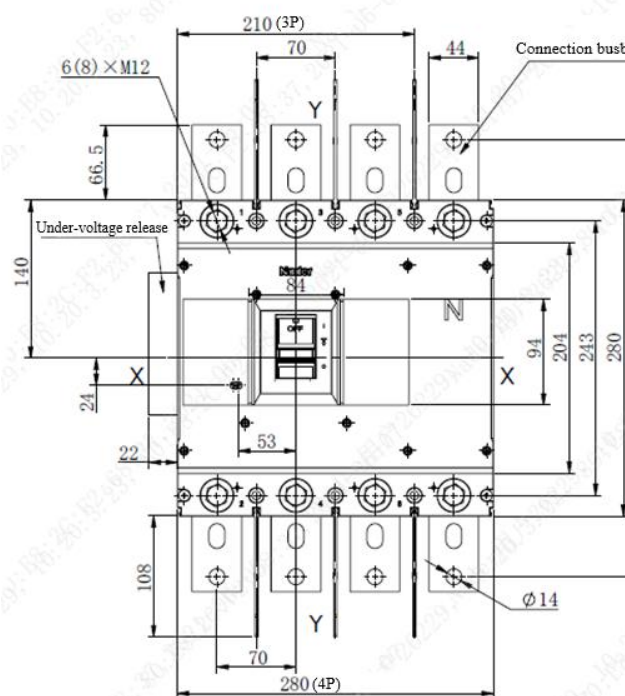


bipolar parallel

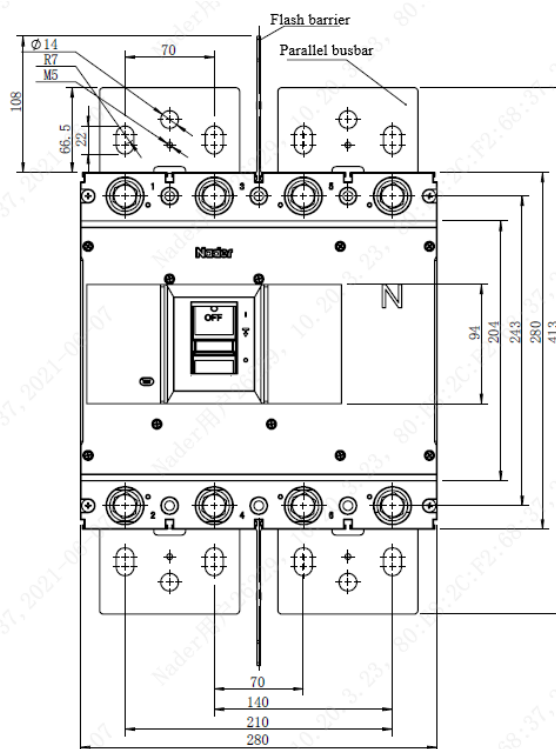

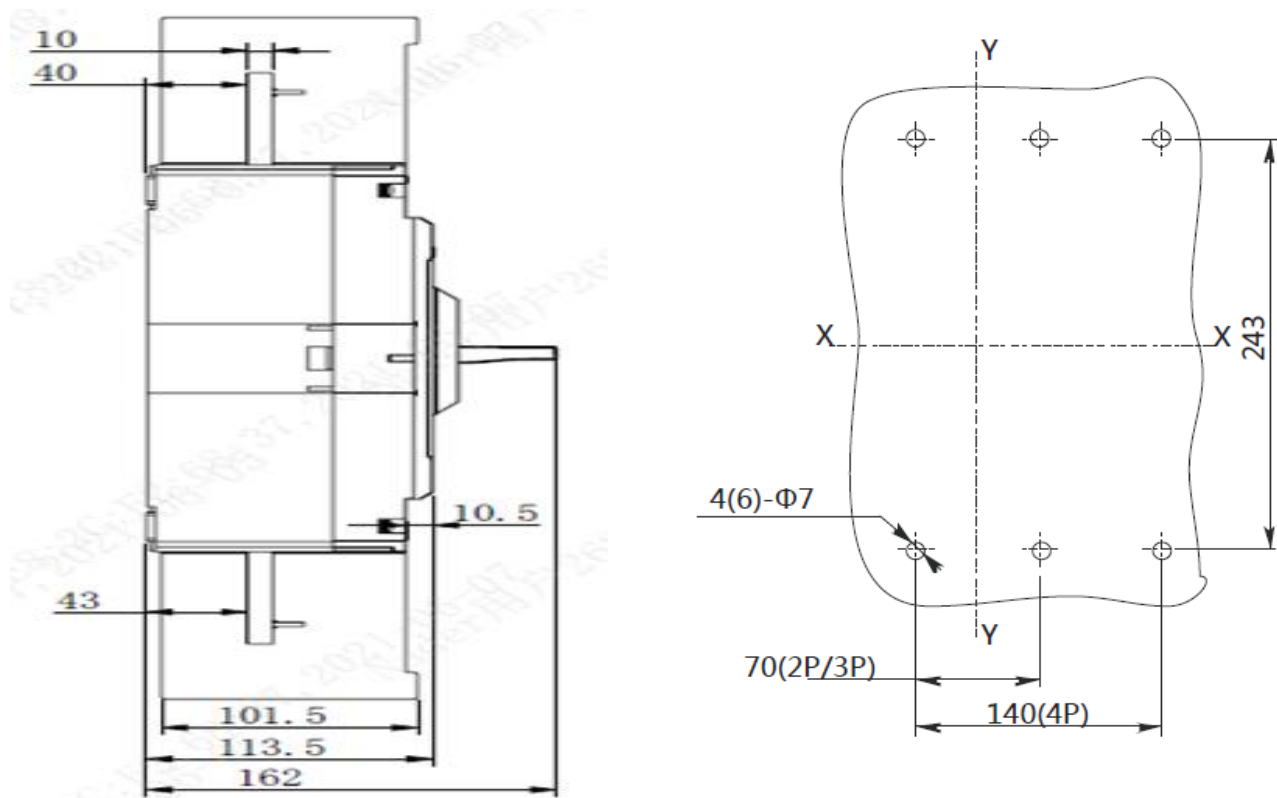

Note: The limit deviation not indicated with the tolerance dimensions is as per GB/T 1804-c.

7.2 Wiring Diagram of Circuit Breaker

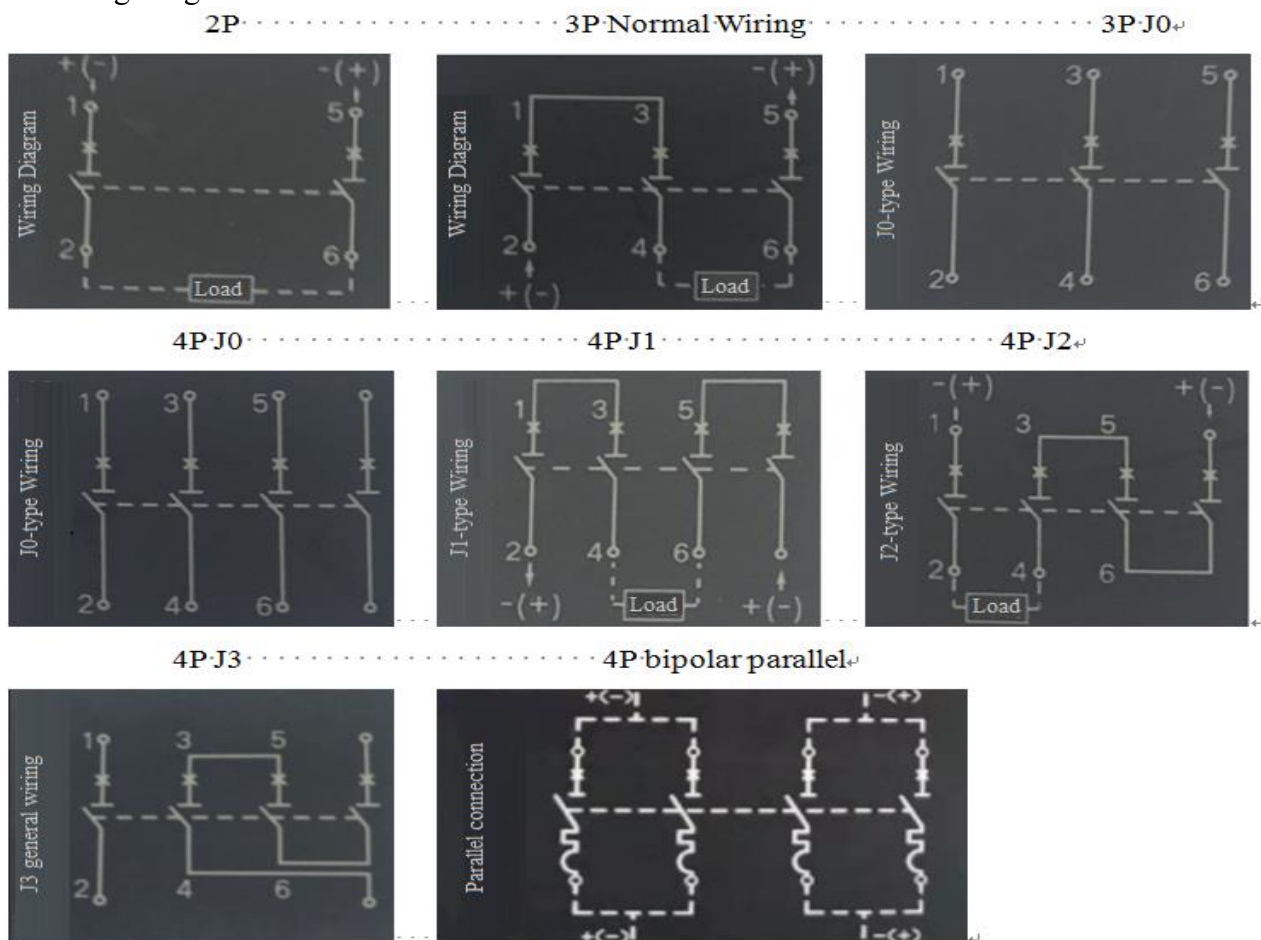

7.3 Safe mounting distance of circuit breaker

Table 7 Insulation Distance Mounted in the Metal Cabinet (Unit: mm)

Mounting distance	A (inlet wire end to the cabinet face)		B (distance from side to the cabinet face)	C (outlet wire end to the cabinet face)
Model	With a terminal cover	Without a terminal cover		
NDM3Z-800	25	120	35	35




Table 8 Minimum Center Distance between Rowed Circuit Breakers (Unit: mm)

Model	Width of circuit breaker		I Center distance	
	2/3 poles	4 poles	2/3 poles	4 poles
NDM3Z-800	210	280	250	320

Note: Check the connected busbar or cable during rowing or stacking of the circuit breaker to ensure that the air insulation distance won't be reduced.

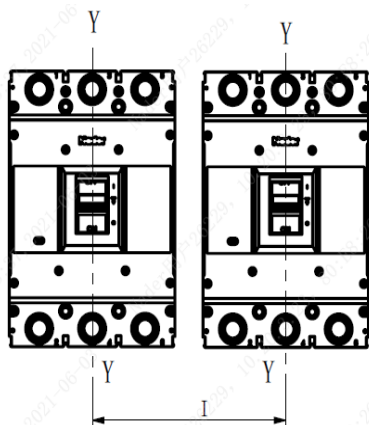


Table 9 Minimum Center Distance between Stacked Circuit Breakers (Unit: mm)

Model	H (distance of circuit breaker from bottom)	
	With a terminal cover	Without a terminal cover
NDM3Z-800	155	155

Note: 1) Bare cable connection


2) Cable insulating connection

3) Connection without insulation

Requirements: Check whether the terminal cover or phase partition is assembled properly before

Model	H (distance of circuit breaker from bottom)	
	With a terminal cover	Without a terminal cover
NDM3Z-800	155	155


products are energized.

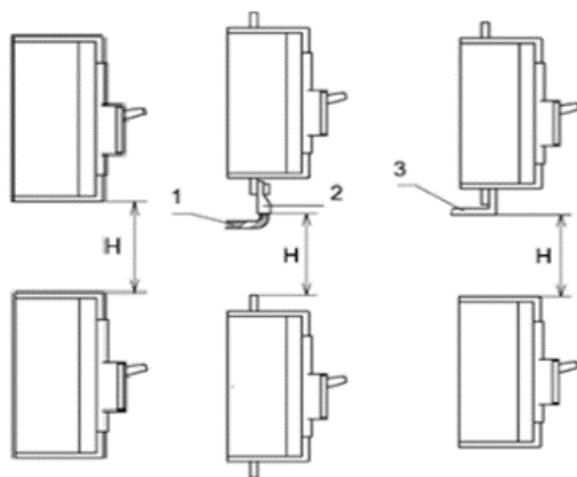


8. Installation Direction of Circuit Breaker

For vertical installation of the product, the gradient between the installation surface and the vertical plane is no more than $\pm 22.5^\circ$.

Horizontal installation of the product.

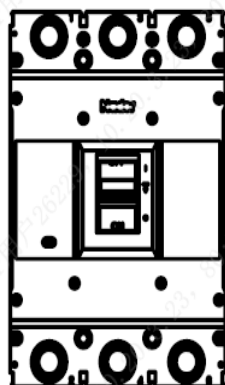

Vertical Installation



Horizontal Installation

9. Packaging and Storage of Circuit Breaker

Minimum packaging quantity: 1 piece/box. The packaged products should be stored in a warehouse with the air ventilation and the relative humidity no more than 80% when the ambient temperature is $-40^\circ\text{C} \sim +75^\circ\text{C}$. No acidic alkaline or other corrosive gas exists in the ambient air in the warehouse. Under the conditions above, the storage period shall be no more than three years since the manufacturing date.

10. Installation Direction of Circuit Breaker

SN	Name	Specification	2/3P Quantity/Set	4P Quantity/Set	
				J0	J1/J2/J3
1	Cross small pan-head screw	M6×95	4	6	6
2	Hexagon nut	M6	4	6	6
3	Spring washer	6	4	6	6
4	Plain washer	6	8	12	12
5	Phase partition	——	4	6	4
6	Plug	——	6	8	8

11. Circuit Breaker Notes

- 1) Various characteristics and accessories of the circuit breaker are set in the factory. The circuit breaker, tripping unit or other accessories can only be adjusted, installed and maintained by the trained or qualified professionals according to the parameter requirements of the line design;
- 2) Ensure that the power supply is off before installing or removing any device;
- 3) The circuit breaker handle can be located in three positions, indicating three states: on, off and free tripping. When the handle is in the free tripping position, pull the handle in the off direction when the circuit breaker is connected and on.