

Shanghai Liangxin Electrical Co., Ltd.

NDM2L-125 Product Specification

(IPD-ENG-DEV-T20 A1 2016-09-23)


| | | | |
|------------------|-----|------|------------|
| Prepared by | 孙兰萍 | Date | 2021-09-28 |
| Reviewed by | 肖柏桃 | Date | 2021-09-29 |
| Countersigned by | 梅阳 | Date | 2021-09-30 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Approved by | 丁飞 | Date | 2021-09-30 |

Post code: 201315 Tel.: (021) 68586699
Page 2 of 13

1. Applicable Scope and Purpose of Circuit Breaker

The NDM2L-125 molded case circuit breaker with the residual current protection (hereinafter referred to as circuit breaker) applies to infrequent switching of circuits with the AC 50/60Hz, the working voltage of AC415V and the working current up to 125A. With the overload, short circuit and undervoltage protection functions, the circuit breaker can protect lines and power equipment from damage. Meanwhile, they can deal with the personal safety, fire hazards and other potential risks caused due to long-term ground faults that can't be detected with the overcurrent protection function.

2. Product Picture of Circuit Breaker (The picture is for reference only; the specific kind prevail)

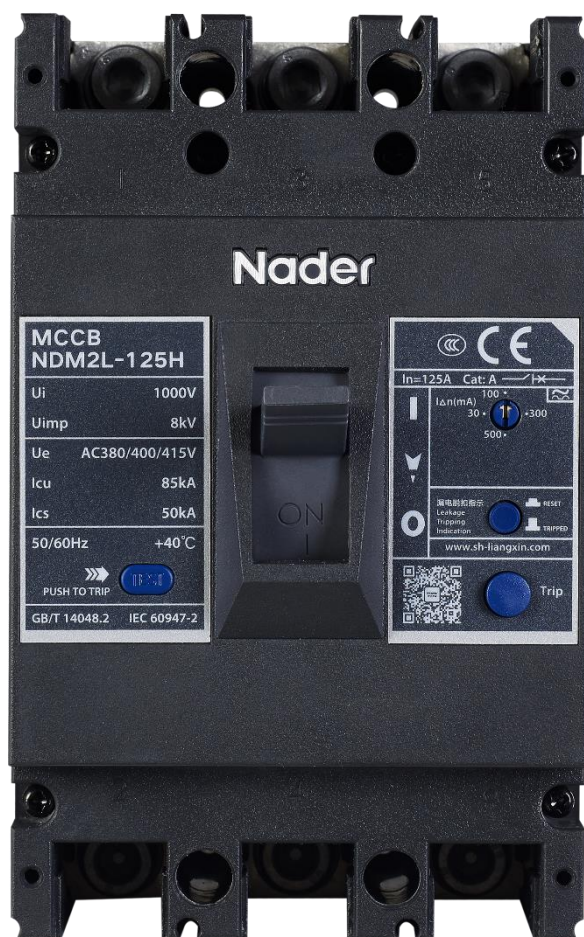

Picture of the Product

3. Specification and Model Description of Circuit Breaker

| $\frac{\square}{\text{ND}}$ 1 | $\frac{\square}{\text{M}}$ 2 | $\frac{\square}{\text{2}}$ 3 | $\frac{\square}{\text{L}}$ - $\frac{\square}{\text{5}}$ 4 | $\frac{\square}{\text{5}}$ 6 | $\frac{\square}{\text{7}}$ / $\frac{\square}{\text{8}}$ 7 | $\frac{\square}{\text{8}}$ 8 | $\frac{\square}{\text{9}}$ 9 | $\frac{\square}{\text{10}}$ / $\frac{\square}{\text{11}}$ 10 | $\frac{\square}{\text{11}}$ 11 | $\frac{\square}{\text{12}}$ 12 | $\frac{\square}{\text{13}}$ 13 | $\frac{\square}{\text{14}}$ 14 | $\frac{\square}{\text{15}}$ 15 | $\frac{\square}{\text{16}}$ 16 | $\frac{\square}{\text{17}}$ 17 | |
|--|--|---------------------------------|--|---------------------------------|--|---------------------------------|---------------------------------|---|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|--|
| SN | SN name | | | | NDM2L | | | | | | | | | | | |
| 1 | Enterprise code | | | | ND: “Nader” low-voltage apparatus | | | | | | | | | | | |
| 2 | Product code | | | | M: Molded case circuit breaker (MCCB) | | | | | | | | | | | |
| 3 | Design SN | | | | 2 | | | | | | | | | | | |
| 4 | Derived code of the series | | | | L: Residual current protection | | | | | | | | | | | |
| 5 | Shell frame level | | | | 125 | | | | | | | | | | | |
| 6 | Breaking capacity level | | | | M: Relatively high breaking type | | | | | | | | | | | |
| | | | | | H: High breaking type | | | | | | | | | | | |
| 7 | Operation mode | | | | No code: Direct handle-operated mode | | | | | | | | | | | |
| | | | | | P: Motor-operated | | | | | | | | | | | |
| | | | | | Z: Rotary operation | | | | | | | | | | | |
| 8 | Derived code of the function | | | | No code: Type AC current leakage protection type | | | | | | | | | | | |
| | | | | | A: Type A current leakage protection type | | | | | | | | | | | |
| 9 | Delay type | | | | X: Non-time delay | | | | | | | | | | | |
| | | | | | Y: Delay | | | | | | | | | | | |
| | | | | | XI: Non-time delay + alarm non-tripping | | | | | | | | | | | |
| | | | | | YI: Delay + alarm non-tripping | | | | | | | | | | | |
| 10 | Residual current release type | | | | V: Type V residual current release | | | | | | | | | | | |
| 11 | Number of poles | | | | 3, 4 | | | | | | | | | | | |
| 12 | Release code | | | | 3: Complex tripper | | | | | | | | | | | |
| 13 | Accessory code | | | | See Table 1 | | | | | | | | | | | |
| 14 | Application code | | | | No code: Power distribution type | | | | | | | | | | | |
| 15 | N-pole (neutral pole) type of the 4P product | | | | A: The N-pole isn't installed with an overcurrent release, but always connected | | | | | | | | | | | |
| | | | | | B: The N-pole isn't installed with an overcurrent release, but on-off with the other three poles | | | | | | | | | | | |
| | | | | | C: The N-pole is installed with an overcurrent tripper, and on-off with the other three poles | | | | | | | | | | | |
| 16 | Rated current | | | | See Table 2 | | | | | | | | | | | |
| 17 | Cabling type | | | | No code: Normal product | | | | | | | | | | | |
| | | | | | P: Connection busbar | | | | | | | | | | | |
| | | | | | Z1: Rear-plate connection | | | | | | | | | | | |
| | | | | | Z2H: Plug-in rear-plate connection | | | | | | | | | | | |
| | | | | | Z2Q: Plug-in front-plate connection | | | | | | | | | | | |
| | | | | | Z3H: Integrated plug-in rear-plate connection | | | | | | | | | | | |
| | | | | | Z3Q: Integrated plug-in front-plate connection | | | | | | | | | | | |
| Note: 1、 When the operation mode is electric operation or manual operation, the residual action current gear, residual current action time gear, and leakage indication button can't be adjusted; 2、 Lower inlet wire not allowed for the 4P Type A product. | | | | | | | | | | | | | | | | |

Table 1: Comparison Table of Accessory Code:

| | | | Legend Single auxiliary contact Dual-auxiliary contact Alarm contact Shunt release Under-voltage release Auxiliary alarm contact (a single accessory features the auxiliary and alarm functions) | |
|----------------|--|-------|---|---|
| Accessory code | Accessory name | Model | NDM2L-125 | |
| | | | 3 | 4 |
| 00 | N/A | | — | |
| 10 | Shunt release | | | |
| 20 | Dual-auxiliary contact | | | |
| 21 | Single auxiliary contact | | | |
| 30 | Under-voltage release | | | |
| 40 | Shunt release, dual-auxiliary contact | | | |
| 41 | Shunt release, single auxiliary contact | | | |
| 60 | Two sets of dual-auxiliary contacts | | | |
| 61 | Two sets of single auxiliary contacts | | | |
| 62 | Dual-auxiliary contact, single auxiliary contact | | | |
| 70 | Under-voltage release, dual-auxiliary contact | | | |
| 71 | Under-voltage release, single auxiliary contact | | | |
| 08 | Alarm contact | | | |
| 28 | Dual-auxiliary contact, alarm contact | | | |
| 58 | Auxiliary alarm contact | | | |
| 68 | Dual-auxiliary contact, auxiliary alarm contact | | | |

Note: The 3P product can only be available with the left-installed single accessory with the accessory code as 10, 20, 21, 30, 08, 58;

For two accessories provided with 4P, the alarm non-tripping function can't be selected simultaneously.

4. Main Technical Parameters of Circuit Breaker

Table 2 Main Technical Parameters of Circuit Breaker

| | | | | | | |
|---|------------------|----------------------------|--|------------------|------------------|-------------------|
| Model | | | NDM2L-125 | | | |
| Rated current of frame I_{nm} (A) | | | 125 | | | |
| Rated current I_n (A) | | | 16, 20, 25, 32, 40, 50, 63, 80, 100, 125 | | | |
| Rated insulation voltage U_i (AC V) | | | 1000 | | | |
| Rated impulse withstand voltage U_{imp} (V) | | | 8000 | | | |
| Rated working voltage U_e (AC V) | | | 380/400/415 | | | |
| Utilization category | | | A | | | |
| Number of poles | | | 3 | | 4 | |
| Breaking capacity level | | | M | H | / | |
| Rated limit short-circuit breaking capacity I_{cu} (kA) | | | 52.5 | 85 | 52.5 | |
| Rated operating short-circuit breaking capacity I_{cs} (kA) | | | 35 | 50 | 35 | |
| Rated residual short-circuit making and breaking capacity $I_{\Delta m}$ (kA) | | | 0.25 I_{cu} | | | |
| Rated residual action current $I_{\Delta n}$ (mA) | Non-time delay | Type AC | Type V 30/100/300/500 | | | |
| | | Type A | Type V 30/100/300/500 | | | |
| | delay | Type AC | Type V 100/300/500 | | | |
| | | Type A | Type V 100/300/500 | | | |
| Rated residual non-action current $I_{\Delta no}$ (mA) | | | 0.5 $I_{\Delta n}$ | | | |
| Residual current action time | Residual current | | $I_{\Delta n}$ | 2 $I_{\Delta n}$ | 5 $I_{\Delta n}$ | 10 $I_{\Delta n}$ |
| | Non-time delay | Maximum breaking time (s) | 0.2 | 0.1 | 0.04 | 0.04 |
| | delay | Maximum breaking time (s) | 0.5, 1.15 2.15 | 0.35, 1 2 | 0.25, 0.9 1.9 | 0.25, 0.9 1.9 |
| | | Limit non-driving time (s) | / | 0.1, 0.5 1 | / | / |
| Operating performance (times) | | Electrical life | | 8000 | | |
| | | Mechanical life | Maintainable free life | 20000 | | |
| | | | Maintainable life | 40000 | | |

4.1 Selection of the circuit breaker connecting bus or cable cross-section area:

Table 3 Selection of the NDM2L-125 Connecting Bus or Cable Cross-section Area

| Rated current (A) | 16, 20 | 25 | 32 | 40, 50 | 63 | 80 | 100 | 125 |
|--|--------|----|----|--------|----|----|-----|-----|
| Wire cross-section area (mm ²) | 2.5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 |

4.2 Tightening Torque of the Circuit Breaker Terminal and Mounting Screw

Table 4 Tightening Torque of the Circuit Breaker Terminal and Mounting Screw

| Model | Thread diameter (mm) | Torque (N·m) |
|-----------|----------------------|--------------|
| NDM2L-125 | M8 | 12 |
| | M4 | 2.4 |

4.3 Derating factor of temperature change for the circuit breaker

Table 5 Derating Factor Table of Temperature Change for the Circuit Breaker

| Model | Derating factor of product temperature change | | | | | | | |
|-----------|---|----|-------|-------|-------|-------|-------|-------|
| NDM2L-125 | Temperature (°C) | 40 | 45 | 50 | 55 | 60 | 65 | 70 |
| | Derating factor | 1 | 0.977 | 0.954 | 0.931 | 0.907 | 0.883 | 0.858 |

Note: 1) When the operating ambient temperature is below +40°C, the product can be used normally without derating capacity.

2) The above derating factors are measured at the frame current.

4.4 High-altitude derating factor of the circuit breaker


Table 6 High-altitude Derating Factor Table of Circuit Breaker

| Elevation (m) | Working current correction coefficient | Power frequency withstand voltage correction coefficient (V) | Isolation voltage correction coefficient (V) |
|---------------|--|--|--|
| 2000 | 1 | 3500 | 1000 |
| 2500 | 1 | 3500 | 1000 |
| 3000 | 0.98 | 3150 | 900 |
| 3500 | 0.97 | 3000 | 850 |
| 4000 | 0.95 | 2800 | 810 |
| 4500 | 0.94 | 2650 | 770 |
| 5000 | 0.93 | 2500 | 730 |

5. Normal Working Environment of Circuit Breaker

- 1) The altitude of the installation site doesn't exceed 2,500m. See the "High-altitude Derating Factor Table of Circuit Breaker" for the derating factor at the altitude;
- 2) The ambient temperature is $-35^{\circ}\text{C} \sim +70^{\circ}\text{C}$; the average within 24 h shall not be more than $+35^{\circ}\text{C}$. If the ambient temperature is higher than $+40^{\circ}\text{C}$, the user needs to reduce the capacity. See the "Derating Factor Table of Temperature Change for the Circuit Breaker" for the derating factor;
- 3) Its relative humidity at an ambient temperature of $+40^{\circ}\text{C}$ should not exceed 50%. A higher relative humidity is allowed at a lower temperature. For example, the relative humidity at 20°C can reach 90%; for frost due to temperature change, the corresponding measures should be taken;
- 4) The product can withstand the effects of wet air, salt mist, oil mist and mould;
- 5) The installation category of the circuit breaker connected to the main loop is: Category III (power distribution and control level), The installation category of the circuit breaker not connected to the main loop is: Category II (load level);
- 6) The pollution level is Level 3;
- 7) The product should be installed in places that are free from explosive media, media corrosive to metal, insulation damaging gas, and conductive dust, which should be also avoided from snow and rain;
- 8) In case of stricter user conditions than the above description, negotiate with the manufacturer.


6. Short-circuit Overload Protection Characteristic Curve of Circuit Breaker

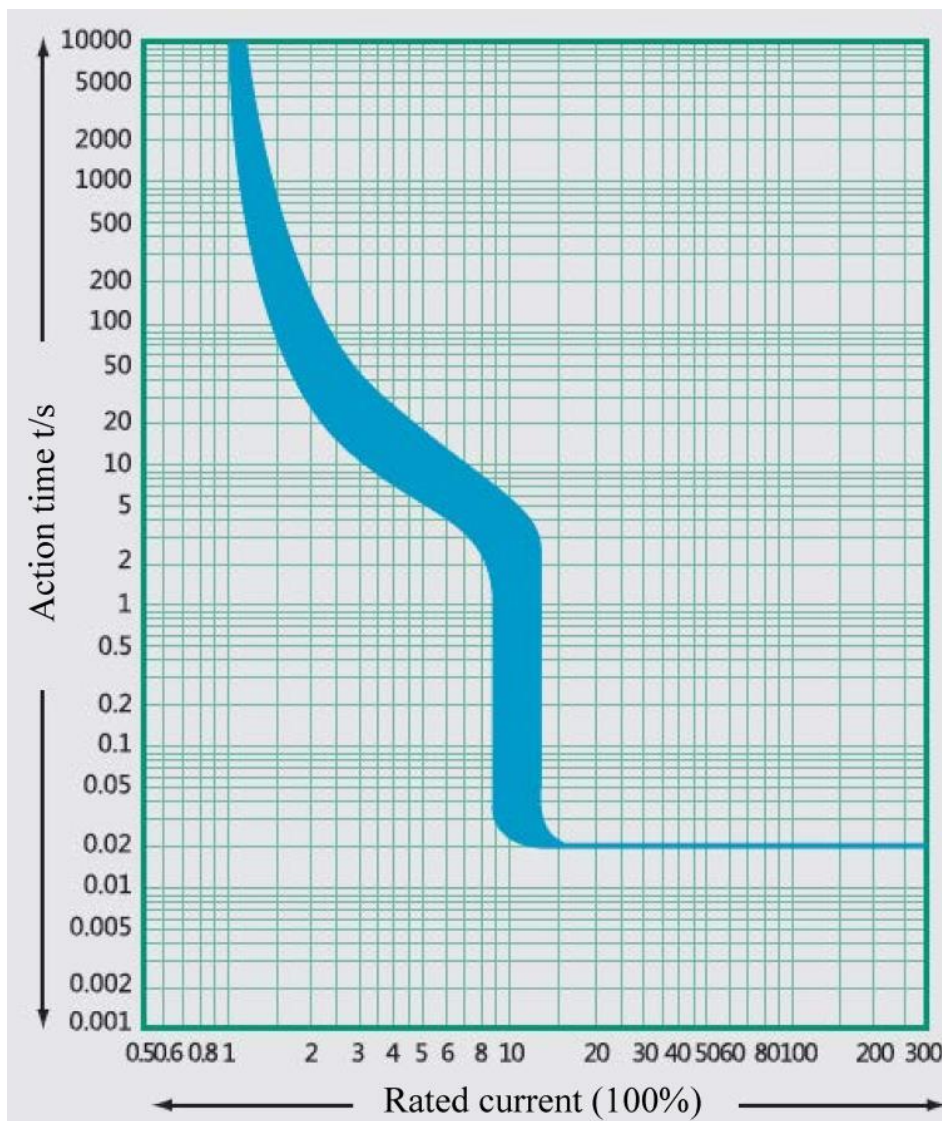

Time/Current Characteristic Curve

7. Outline and Mounting Hole Dimensions of Circuit Breaker

7.1 Outline and mounting hole dimensions of circuit breaker

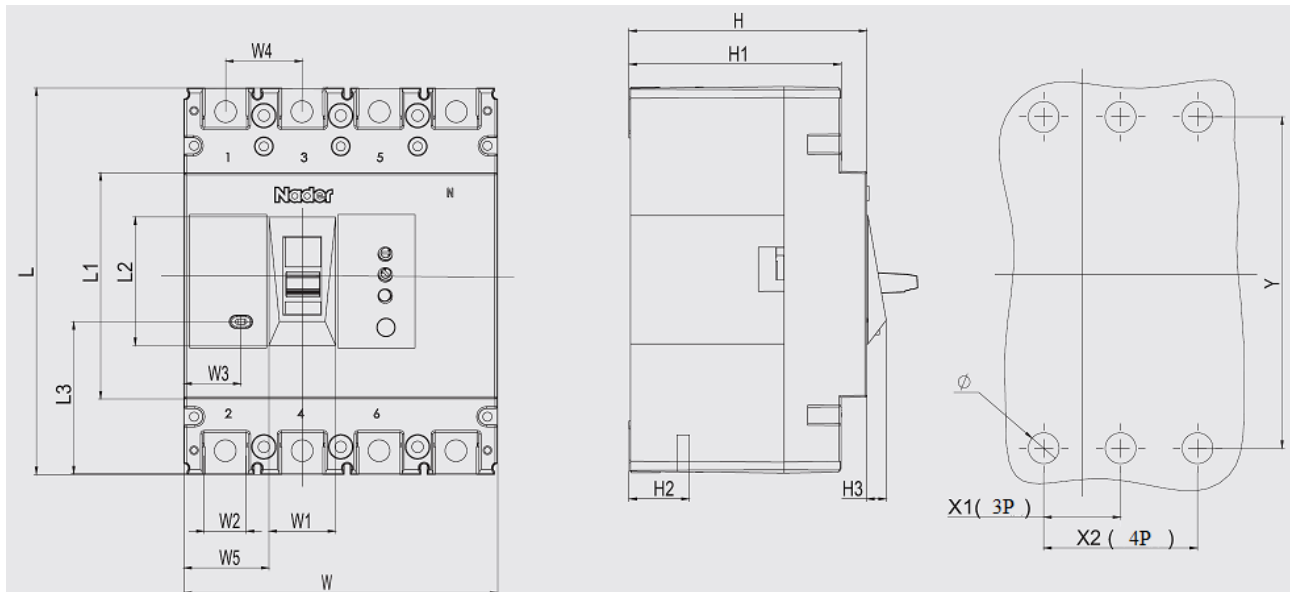

| Product model | L | L1 | L2 | L3 | W | | W1 | W2 | W3 | W4 | W5 | H | H1 | H2 | H3 | Y | X1 | X2 | Φ |
|---------------|-----|----|----|----|----|-----|----|----|----|----|----|------|------|----|-----|-----|----|----|-----|
| | | | | | 3P | 4P | | | | | | | | | | | | | |
| NDM2L-125 | 150 | 88 | 50 | 59 | 92 | 122 | 26 | 18 | 22 | 30 | 33 | 92.5 | 82.5 | 29 | 7.5 | 129 | 30 | 60 | 4.5 |

Note: The limit deviation not indicated with the tolerance dimensions is as per GB/T 1804-c.

7.2 Safe mounting distance of circuit breaker

Table 7 Insulation Distance Mounted in the Metal Cabinet (Unit: mm)

| Mounting distance | A (inlet wire end to the cabinet face) | | B (distance from side to the cabinet face) | C (outlet wire end to the cabinet face) |
|-------------------|--|--------------------------|--|---|
| Model | With a terminal cover | Without a terminal cover | | |
| NDM2L-125 | 25 | 65 | 30 | 30 |

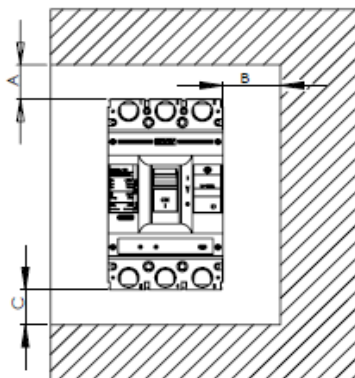


Table 8 Minimum Center Distance between Rowed Circuit Breakers (Unit: mm)

| Model | Width of circuit breaker | | I Center distance | |
|-----------|--------------------------|---------|-------------------|---------|
| | 3 poles | 4 poles | 3 poles | 4 poles |
| NDM2L-125 | 92 | 122 | 122 | 152 |

Note: Check the connected busbar or cable during rowing or stacking of the circuit breaker to ensure that the air insulation distance won't be reduced.

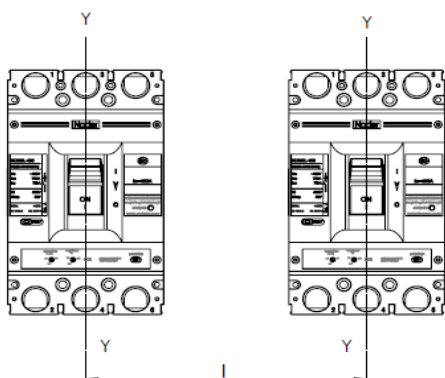


Table 9 Minimum Distance between Stacked Circuit Breakers (Unit: mm)


| Model | H (distance of circuit breaker from bottom) | |
|-----------|---|--------------------------|
| | With a terminal cover | Without a terminal cover |
| NDM2L-125 | 90 | 91 |

Note: 1) Bare cable connection

2) Cable insulating connection

3) Connection without insulation


Requirements: Check whether the terminal cover or phase partition is assembled properly before products are energized.

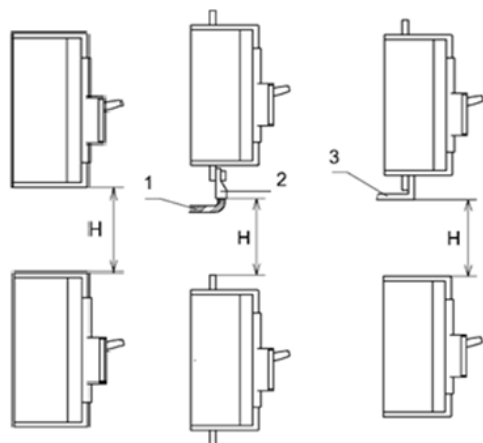

8. Installation Direction of Circuit Breaker

For vertical installation of the product, the gradient between the installation surface and the vertical plane is no more than $\pm 22.5^\circ$.

Horizontal installation of the product.

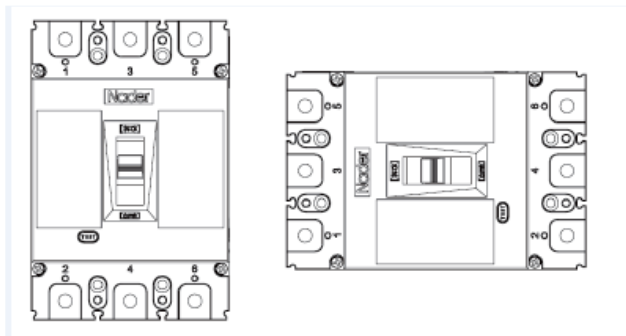

Vertical Installation

Horizontal Installation

9. Packaging and Storage of Circuit Breaker

Minimum packaging quantity: 1 piece/box. The packaged products should be stored in a warehouse with the air ventilation and the relative humidity no more than 80% when the ambient temperature is $-40^\circ\text{C} \sim +75^\circ\text{C}$. No acidic alkaline or other corrosive gas exists in the ambient air in the warehouse. Under the conditions above, the storage period shall be no more than three years since the manufacturing date.

10. Installation Direction of Circuit Breaker

| SN | Name | Specification | 3P Quantity/Set | 4P Quantity/Set |
|----|----------------------------|---------------|-----------------|-----------------|
| 1 | Cross small pan-head screw | M4×45 | 4 | 6 |
| 2 | Hexagon nut | M4 | 4 | 6 |
| 3 | Spring washer | 4 | 4 | 6 |
| 4 | Plain washer | 4 | 4 | 6 |
| 5 | Phase partition | — | 4 | 6 |

11. Circuit Breaker Notes

- 1) Various characteristics and accessories of the circuit breaker are set in the factory. The circuit breaker, tripping unit or other accessories can only be adjusted, installed and maintained by the trained or qualified professionals according to the parameter requirements of the line design;
- 2) Ensure that the power supply is off before installing or removing any device;
- 3) The circuit breaker handle can be located in three positions, indicating three states: on, off and free tripping. When the handle is in the free tripping position, pull the handle in the off direction when the circuit breaker is connected and on.